

**elock EM Lock Series**

elock-600 Series electromagnetic locks offer cost effective solution with easy installation & suitable for variety of application . It has no moving parts thus keeping maintenance to a minimum.

All types of brackets are available to ease installation for both in-swing & out-swing doors.




**elock-600 / elock-600L**

- \* 600lbs holding force
- \* Dual voltage 12 & 24 Vdc
- \* Current drawn 500mA / 250mA
- \* MOV surge protection
- \* Fail-Safe type
- \* Unmonitored Model ( elock-600 ) & Monitored Model ( elock-600L )
- \* Push-off button on armature for instant release
- \* Dimension : -

Magnet : 250(L) X 41(W) X 26(D) mm

Armature Plate : 170(L) X 38(W) X 11(D) mm

\* Safety Approval

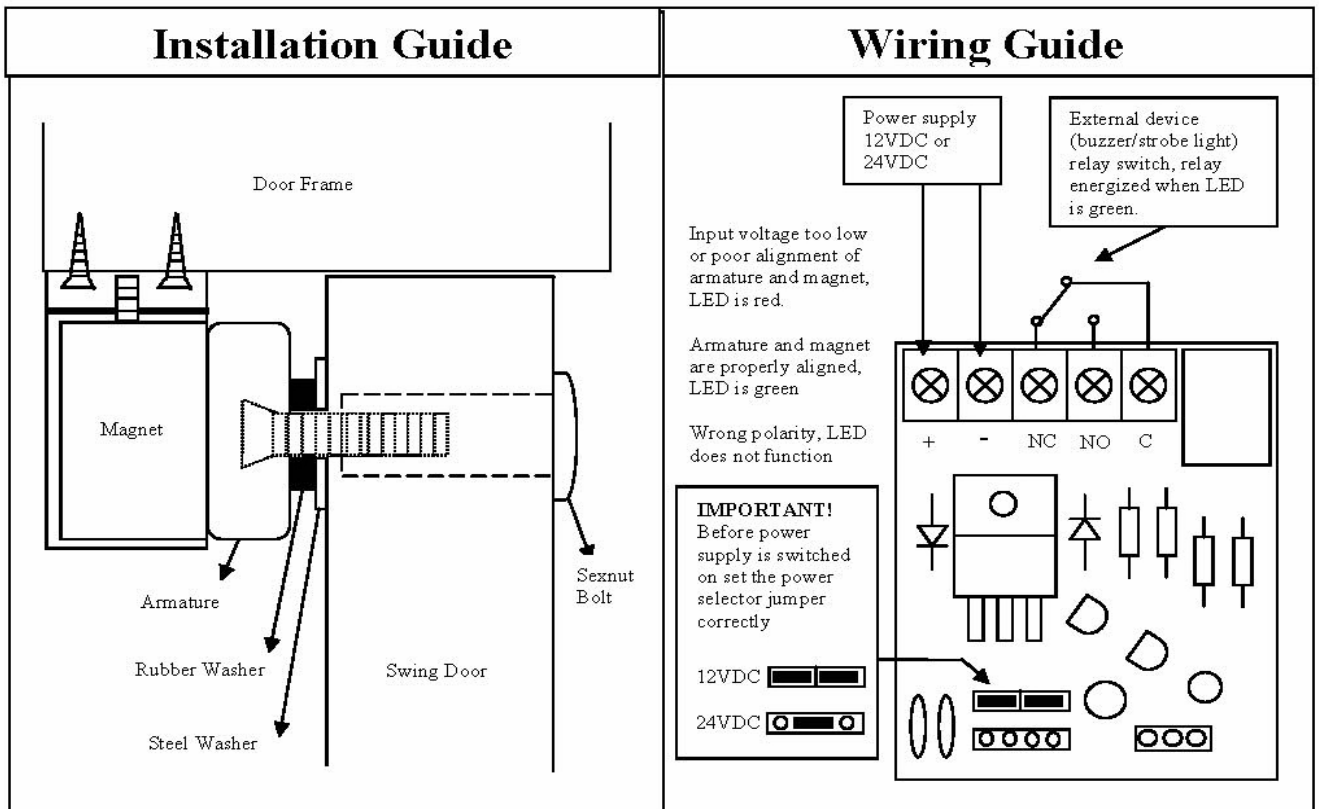

## EL-BKL ( L Bracket )

- \* Adjustable "L" bracket for outward door, when the header is narrow.
- \* Available for elock-300, 600 & 1200 Series



## EL-BKU ( U Bracket )

- \* Specially designed for glass door solution
- \* Available for elock-300 & 600 Series




## EL-BKZ ( ZL Bracket )

- \* Adjustable "ZL" bracket for inward door application.
- \* Available for elock-300, 600 & 1200 Series application.



### 1. Standard mounting :-

With Filler Plate attached on top of EM Lock.

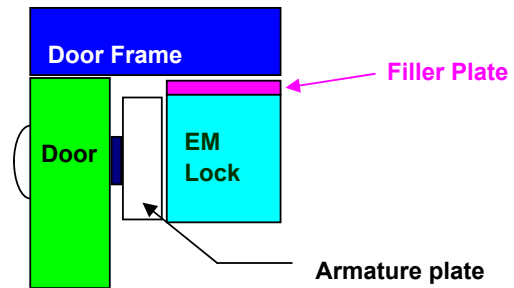


### 2. L Bracket Mounting :-

Mounting with "Adjustable L Bracket" when Door frame is narrow.

#### Mounting Procedure :-

Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable L Bracket " set.

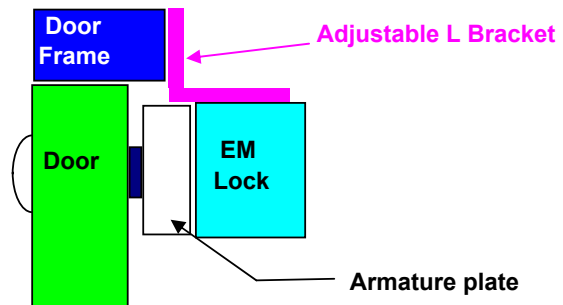

### 3. ZL Bracket mounting :-

Mounting with " ZL Bracket " for In-swing door application.

#### Mounting Procedure :-

Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable ZL Bracket " set.

